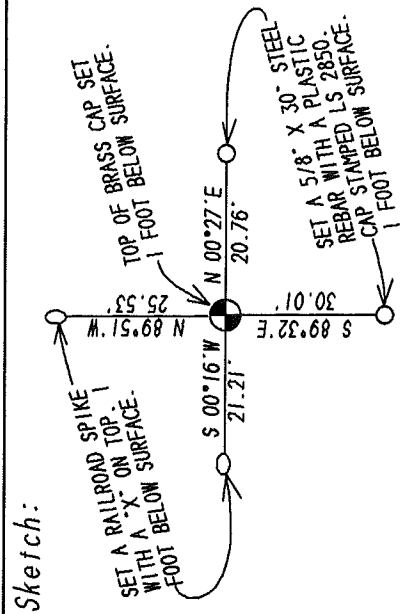



OREGON PUBLIC LAND CORNER REPORT / RESTORATION REPORT

MORROW COUNTY SURVEYOR'S OFFICE

SECTION $\frac{1}{4} \frac{3}{4} \frac{10}{10}$	TOWNSHIP T 1 N	RANGE R 26 E OF THE WILLAMETTE MERIDIAN	DATE AUGUST 2008
MORROW COUNTY			
CORNER DESIGNATION: (Please check one) <input type="checkbox"/> Condition Report Only <input checked="" type="checkbox"/> Not Found <input type="checkbox"/> Renewed <input type="checkbox"/> Unrecorded <input checked="" type="checkbox"/> Surveyed In <input checked="" type="checkbox"/> Referenced Out			
1/4 CORNER COMMON TO SECTIONS 3 AND 10, WILLAMETTE MERIDIAN, MORROW COUNTY, OREGON. Previous Renewals / Surveys, etc. ORIGINAL GLO SURVEY BY E. HAFT IN 1861. Monument(s) & Accessories Found: (Condition & Source) FARMING OPERATIONS AT CORNER LOCATION HAS DESTROYED ANY ORIGINAL EVIDENCE.			
Monument Detail: <div style="text-align: center; border: 1px solid black; border-radius: 50%; width: 150px; height: 150px; margin: 0 auto; display: flex; flex-direction: column; align-items: center; justify-content: center;"> T 1 N R 26 E $\frac{1}{4} \frac{3}{10}$ 2008 LS 2850 </div>	Sketch: 		
Monument Set (Procedures and Description): SET AS DESCRIBED ABOVE USING SINGLE PROPORTIONATE METHODS. SEE MORROW COUNTY, OREGON PARTITION PLAT 2008-2 WHICH I DID FOR BRIAN AND PEGGY DOHERTY FOR FULL DETAILS.			
New Accessories: 5/8" X 30" STEEL REBAR WITH PLASTIC CAP BEARS N 00° 27' E 20.76'; ONE BELOW SURFACE. 5/8" X 30" STEEL REBAR WITH PLASTIC CAP BEARS S 89° 32' E 30.01'; ONE BELOW SURFACE. RAILROAD SPIKE WITH AN "X" MARKED ON TOP BEARS S 00° 16' W 21.21'; ONE BELOW SURFACE. RAILROAD SPIKE WITH AN "X" MARKED ON TOP BEARS N 89° 51' W 25.53'; ONE BELOW SURFACE.			
Location & Comments: IN WHEAT FIELD, NEXT TO 90° CURVE IN GRIEB LANE, A MORROW COUNTY ROAD. Compass Declination: NOT DETERMINED			
Firm / Agency COPPOCK SURVEYING PO Box 495 HEPNER, OR 97836			
Party Chief JUDSON L. COPPOCK LS 2850			
Notes SHANNON BENEFIT			
Witness SHANNON BENEFIT			
SURVEYOR'S SEAL REGISTERED PROFESSIONAL LAND SURVEYOR  OREGON JANUARY 20 1998 JUDSON L. COPPOCK 2850		RENEWAL DATE: DEC. 31, 2009	

Rec'd By SKB
 Morrow County Surveyor
 Date Oct 5 2008
 RECEIVED BY
 Morrow County Surveyor
 Date Oct 5 2008