

OREGON CORNER RESTORATION FORM

Section 34 Township 2S Range 26E
 County Morrow Date: August 9, 2017

Corner Designation: 2S26Z13

Corner common to sections 33 and 34, T2S, and sections 3 and 4, T3S, R26E, W.M., Morrow County, Oregon.


Condition Report Only
 Not found
 Remonumented
 Unrecorded
 Surveyed in
 Referenced out

Previous Renewals / Surveys, etc.

The corner was originally set by B.J. Pengra under contract 119 dated February 15, 1867. His record reads: Set corner to sections 3, 4, 33, and 34. Drove charred stake and raised mound. In contract 176 dated July 20, 1872, U.S. Deputy Surveyor George Williams calls for a "stone corner" at this point. In 2002 Judson Coppock reported setting a brass cap for this corner by single proportion for the departure and holding an existing fence for latitude.

Monument and Accessories found: (condition and source)

I found a distinct mound of stone in the existing fence line. I found no trace of any monument set by Judson Coppock.

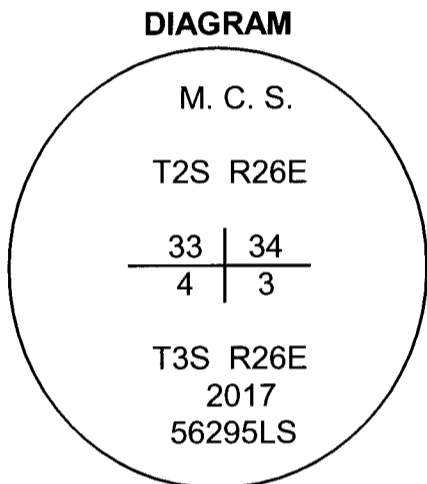

⊙ = Brass Cap
 • = Rebar References

MONUMENT (S) AND ACCESSORIES SET (Procedures and Description)

In the center of the stone mound I set a 2 3/8" brass cap on a 1 1/2" galvanized iron pipe flush with the surface. This location was confirmed by ties to Stock Drive road to the west and the 1/4 monument by Reid to the east.

For references, I set four 5/8" by 24" rebars with 1.25" orange plastic caps stamped WTS and 56295LS as described below:

- an iron rebar bears N04°02'51"E, 54.34 feet;
- an iron rebar bears N89°21'23"W, 23.35 feet under the existing fence;
- an iron rebar bears S89°37'26"E, 37.17 feet;
- an iron rebar bears S00°36'17"W, 68.36 feet;
- the unmonumented computed point by Coppock bears N60°34'57"E, 20.71 feet more or less and lies 12 feet, more or less, north of the existing fence line.

Measurements were made with a Trimble RTK GPS.

Location and comments

Compass Declination

Surveyor's Seal

RECEIVED BY:
Morrow County Surveyor
 Date: 9-21-2017
 Rec'd By: S.K.H.
 No. 2017-2526Z13
 Survey No. 2017-1806D

Firm / Agency
Morrow County Surveyor
 Address
P.O. Box G
Pilot Rock, Or. 97868
 Party Chief

**REGISTERED
 PROFESSIONAL
 LAND SURVEYOR**

Stephen K. Haddock

OREGON
 JULY 9, 2001
 STEPHEN K. HADDOCK
 56295LS

RENEWS: 6-30-19