

**OREGON CORNER RESTORATION FORM**

Section 14 Township 2S  
County MORROW Date: 12/08/21

Range 29E

Corner Designation: 2S29L17

Section Corner common to T2S29E 1/4 S15/S14

- \_\_\_\_\_ Condition Report Only
- \_\_\_\_\_ Not Found
- X   Remonumented
- \_\_\_\_\_ Unrecorded
- \_\_\_\_\_ Surveyed In
- \_\_\_\_\_ Referenced Out


**Previous Renewals / Surveys, etc.**

Originally Surveyed by Pershin on September 14, 1871, under GLO contract No. 154 as follows:  
Set a 20X8X6 Stone for the corner.


**Monuments and Accessories Found: (Condition and Source)**

THE CORNER POSITION HAS BEEN FARMED OUT. THE CORNER AREA IS NOW IN PASTURE.  
NOTHING FOUND.

Diagram



Sketch (NTS)

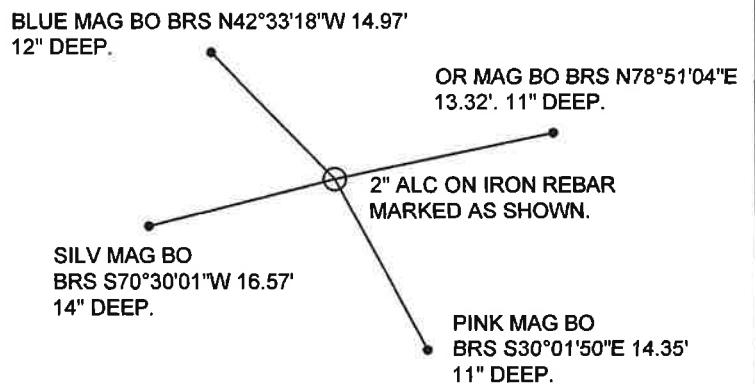

NOTE: ALL BEARINGS AND DISTANCES ARE NAD83 ORNSPC GRID VALUES BASED ON RTK GPS OBSERVATIONS.

NAD 83/91  
OREGON STATE PLANE NORTH  
INTERNATIONAL FEET (GRID VALUES)

N629440.32 E8541874.18  
LAT - 45° 23' 07.99" N  
LON - 119° 10' 38.78" W

**Monument (s) Set (Procedures and Description)**

SET A 2" ALUMINUM CAP ON A 5/8"X30" IRON REBAR DRIVEN TO REFUSAL AT 20" UNDER THE SURFACE.  
WITH A SMALL MOUND OF STONES AROUND THE CAP.

**References Set:** BERNTSEN "DEEP1" MAGNETS USED AS BEARING OBJECTS.

- AN ORANGE MAGNET BEARS N78°51'04"E, 13.32'. 11" DEEP.
  - A PINK MAGNET BEARS S30°01'50"E, 14.35'. 11" DEEP.
  - A SILVER MAGNET BEARS S70°30'01"W, 16.57'. 14" DEEP.
  - A BLUE MAGNET BEARS N42°33'18"W, 14.97'. 12" DEEP.
- BEARING OBJECT SIGNS WERE BURIED OVER THE TOP OF THE MAGNETS.  
A WITNESS SIGN WAS BURIED OVER THE TOP OF THE MONUMENT.

**Location and Comments**

APPROX. 380' WEST OF GRAVEL  
DRIVEWAY TO RANCH HOUSE.

**Compass Declination**

14° E

**Surveyors Seal**

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Robert D. English*

OREGON  
JANUARY 11, 2005  
ROBERT DOUGLAS ENGLISH  
43406LS

RENEWAL DATE: 12/31/23

**RECEIVED BY:**

Date: 12-23-21  
Rec'd By: MPK  
No. 2529L17

**Firm / Agency**

Survey One, LLC.  
P.O. Box 382  
Pendleton, OR 97801  
(541) 276-2055