


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

U.S.F.S. INDEX No. J-5

**History of original corner establishment:** This corner was originally established by Zenas F. Moody in 1873, under GLO Contract No. 184.

**DIAGRAM**



Surveyor General Field Notes State:

Set stone 24x16x12 in earth mound for Cor. to Secs 17-18-7-8

**Description of Corner Evidence Found:**

No original corner evidence found. Set a double proportionate measure from the corners 2 miles north, 1/2 mile south, 1 mile west and 1/2 mile east.

**Description of monument and accessories I established to perpetuate the original location of this corner:**

At the proportionate position, Set a 2-1/2"x30" aluminum pipe with 2-1/2" aluminum cap, stamped as shown in DIAGRAM, 10" in the ground, raised a 4 ft. dia. by 2 ft. high mound of stone.


From which:

Set a 5/8"x30" iron pins with plastic caps stamped PLS 848 at the following bearings and distances:

- N50°35'W, 26.06 ft., no grooves on pin, set in md. of stone.
- N39°15'E, 25.44 ft., one groove in top of pin, set in md. of stone.
- S52°41'E, 22.72 ft., two grooves in top of pin, set in md. of stone.
- S61°30'W, 21.27 ft., three grooves in top of pin, set in md. of stone.

Measurements to accessories taken with a Wild TC1600 Total Station

This work was performed by:  
Douglas M. Ferguson, PLS 848  
Witnessed by: D. Mitchell Ferguson  
and Brad Cates  
Date: 4-20-98

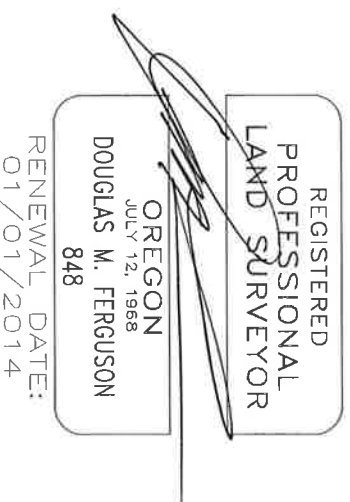

Office of Surveyor, County of Morrow, State of Oregon,  
I hereby certify that the within instrument was  
filed in this office for record on the 23 day of August, 2013

Steve K. Hubbard by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)

Refer to Morrow County Map No. 2013-34D