

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

U.S.F.S. INDEX No. J-9

History of original corner establishment: This corner was originally established by Zenas F. Moody in 1873, under GLO Contract No. 184.

DIAGRAM

T4S	R27E
S 8	S 9
S17	S16
1998	
PLS 848	

Surveyor General Field Notes State:

Set stone 24x16x10 in earth mound for Cor. to Secs 16-17-8-9

Description of Corner Evidence Found:

Found an old rock crib with a 20x15x9 stone in center. No other stones of call size in the area. Accepted the rock crib as the best evidence of the original corner position.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the center of the rock crib, Set a 2-1/2"x30" aluminum pipe with 2-1/2" aluminum cap, stamped as shown in DIAGRAM, 24" in the ground, placed ring of stones around the monument.

From which:

Set a 5/8"x30" iron pins with plastic caps stamped PLS 848 at the following bearings and distances:

N48°57'W, 28.92 ft., no grooves.

N52°35'E, 38.47 ft., one groove in top of pin.

S36°16'E, 27.91 ft., two grooves in top of pin.

S58°47'W, 31.60 ft., three grooves in top of pin.


Measurements to accessories taken with a Wild TCI600 Total Station

This work was performed by:

Douglas M. Ferguson, PLS 848

Witnessed by: D. Mitchell Ferguson and Brad Cates

Date: 4-20-98

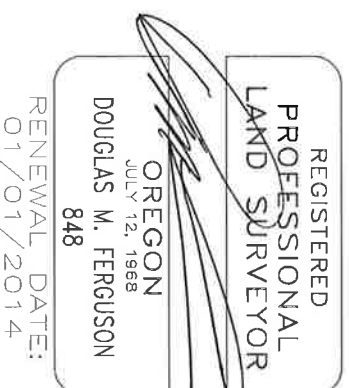

Office of Surveyor, County of Morrow, State of Oregon,
I hereby certify that the within instrument was
filed in this office for record on the 23 day of August, 2013

Dale K. Black by _____
(COUNTY OFFICIAL) (DEPUTY)

Refer to Morrow County Map No. 2013-34D