

**OREGON CORNER RESTORATION FORM**

Section 29 Township 3S Range 29E  
County Morrow Date: July 9, 2005

Corner Designation: 3S29R5

Corner to sections 19, 20, 29, and 30, T3S, R29E,  
W.M., Morrow County, Oregon.


Previous Renewals / Surveys, etc.

Corner originally set by George Williams under contract No. 176 dated July 20, 1872. His record reads: Set stone, 22 x 16 x 4 for cor. to secs. 19, 20, 29, 30 near the head and on south side of hollow.


Condition Report Only	
Not found	
Remonumented	<u>x</u>
Unrecorded	
Surveyed in	
Referenced out	<u>x</u>

Monument and Accessories found: ( condition and source )  
The original stone, plainly chisled and firmly in place as described.

**DIAGRAM**

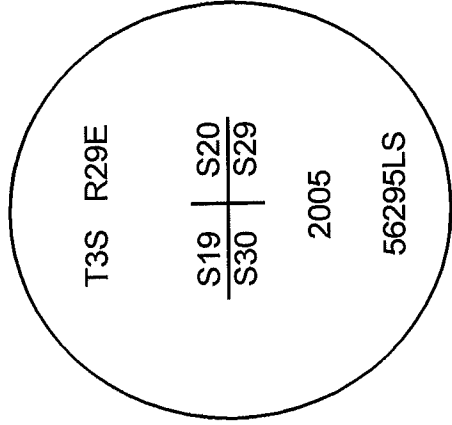

**SKETCH**

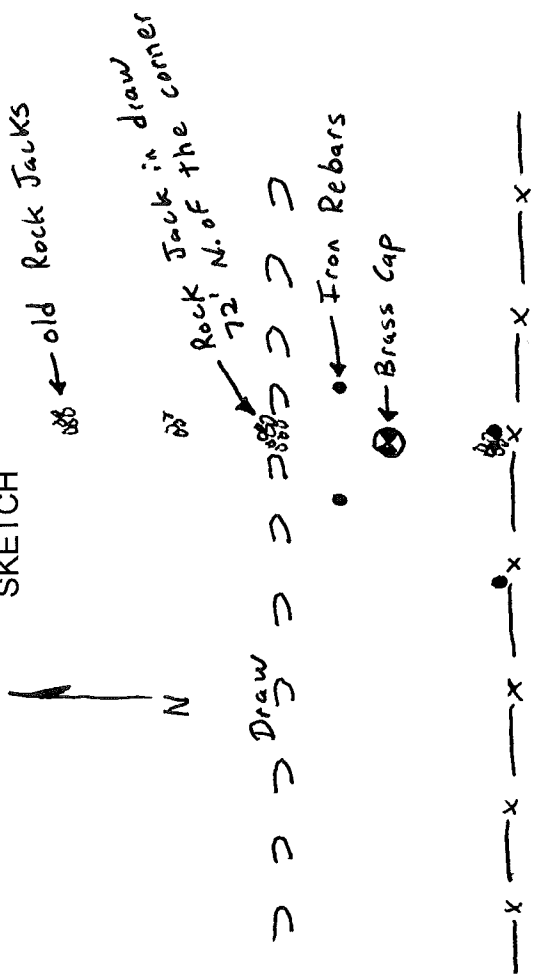

**MONUMENT (S) AND ACCESSORIES SET (Procedures and Description)**

I set a 1 1/2" x 30" galvanized iron pipe with a 2 1/4" brass cap stamped as shown in the diagram above at the position of the original stone. I buried the stone on its side on the North side of the pipe.

For references, I set four, 5/8" by 24" rebars with 1 1/8" orange plastic caps attached, stamped WTS and 56295LS as described below:  
an iron rebar bears N45°54'22"E, 33.00 feet;  
an iron rebar bears N53°53'53"W, 29.61 feet;  
an iron rebar bears S09°28'27"E, 28.35 feet in the old fence corner rock jack;  
an iron rebar bears S41°26'51"W, 28.35 feet;

The monument and references were tied using a Trimble R7/R8 RTK GPS.

Location and comments

Compass Declination

Surveyors Seal

**RECEIVED BY:**

Morrow County Surveyor  
Date: AUG 30, 2005  
Rec'd By: SKB  
No. \_\_\_\_\_

Firm / Agency  
Witness Tree Surveying  
Address  
P.O. Box G  
Pilot Rock, Or. 97868  
Party Chief  
Stephen K, Haddock



*Stephen K. Haddock*  
OREGON  
JULY 9, 2001  
STEPHEN K. HADDOCK  
56295LS

RENEWAL DATE 6-30-07