

OREGON CORNER RESTORATION FORM

Section 34 Township 3S Range 29E
County Morrow Date: July 26, 2005

Corner Designation: 3S29Z17

South section corner to sections 34 and 35, T3S, R29E,
W.M., Morrow County, Oregon. Corner for T3S only.


Previous Renewals / Surveys, etc.

The corner was originally set by George Williams under contract No. 176 dated July 20, 1872. His record reads: Set stone 18x11x6 for corner to Sections 34 and 35 from which a pine, 12 in. diam. bears N72°30'E. 150lks dist, A pine 26 in. diam. bears S34°E. 350 lks. dist.; This line was retraced by E. Sanderson under contract No. 417 dated August 24, 1881. His record reads: found a basalt stone 8x8x6" above ground, firmly set in ground for corner to Secs. 34 & 35, T3S, R29E, marked with 2 notches on E. 4 notches on W. and 6 notches on N. edges, from which a pine, 15 in. diam. bears N70°E. 150 lks dist. marked T3S R29E. Sec 35 B.T.

Monument and Accessories found: (condition and source)


I found a reddish sandstone rock marked with 6 distinct notches on the N. face in a mound of basalt and sandstone rocks. There was a rotten pine stump N66°E, 110 ft. distant. The original stone was very crumbly on the E. and W. edges.

DIAGRAM

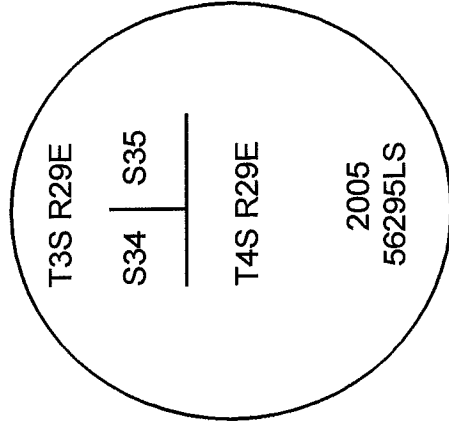

SKETCH

● = Brass cap
○ = Iron Rebar

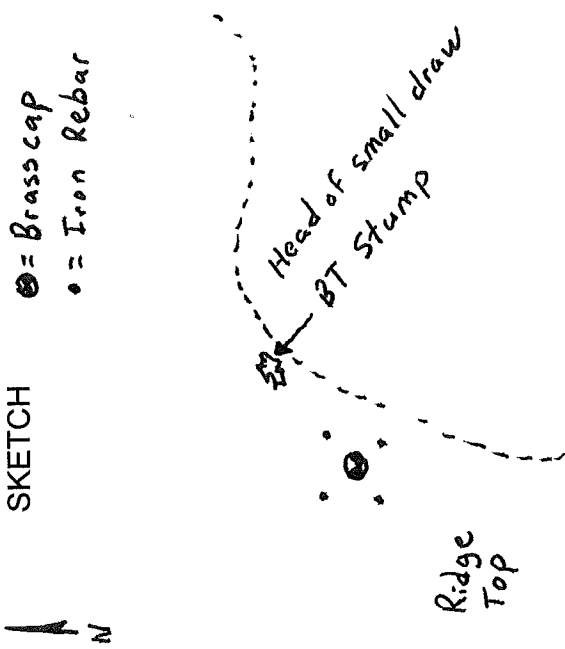

MONUMENT (S) AND ACCESSORIES SET (Procedures and Description)

At the corner point I set a 2 3/8" brass cap on a 1 1/2" x 30" galvanized iron pipe 30" in the ground. I buried the original stone on the S. side of the pipe and rebuilt the stone mound around the brass cap.

For references, I set four 5/8" by 24" iron rebars with 1 1/8" orange plastic caps stamped WTS and 56295LS as described below:
an iron rebar bears N32°00'06"E, 31.79 feet;
an iron rebar bears N73°09'43"W, 29.54 feet;
an iron rebar bears S65°11'40"E, 32.51 feet;
an iron rebar bears S22°31'47"W, 34.29 feet;

The monument and references were tied using a Trimble R7/R8 RTK GPS.

Location and comments

Compass Declination

Surveyors Seal

RECEIVED BY:

Morrow County Surveyor
Date: Aug 30 2005
Rec'd By: SKB
No. _____

Firm / Agency
Witness Tree Surveying
Address
P.O. Box G
Pilot Rock, Or. 97868
Party Chief
Stephen K, Haddock

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Stephen K. Haddock

OREGON
JULY 9, 2001
STEPHEN K. HADDOCK
56295LS

RENEWAL DATE 6-30-07