

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Page 2 of 2

Monument and accessories established to perpetuate the original position of this corner:

In place of the original corner stone, I set a 1" x 30" galvanized, flared iron pipe 18" into the ground to bedrock. A 2 1/2" brass cap attached is marked as shown in the diagram above.

I place the corner stone along the west side of the pipe and build a mound of stones around the corner stone and pipe, from which:

A 5/8" x 24" iron rod, set 23" into the ground with a 3/4" brass washer, marked "PLS 1636 S31", attached at ground level, bears N25° 30'E, 55.2 feet.


A 5/8" x 24" iron rod, set 23" into the ground with a 3/4" brass washer, marked "PLS 1636 SE", attached at ground level, bears S43°E, 81.1 feet.

A 5/8" x 24" iron rod, set 23" into the ground with a 3/4" brass washer, marked "PLS 1636 SW", attached at ground level, bears S8°W, 146.0 feet.

A 5/8" x 24" iron rod, set 23" into the ground with a 3/4" brass washer, marked "PLS 1636 S36", attached at ground level, bears N34°W, 68.7 feet.

A 5 foot steel fence post with a "Witness Post" sign attached is set along the northwest side of the pipe.

I hereby certify the above corner point was perpetuated as hereon described on August 15, 2000. Magnetic declination set in compass: 18°E.

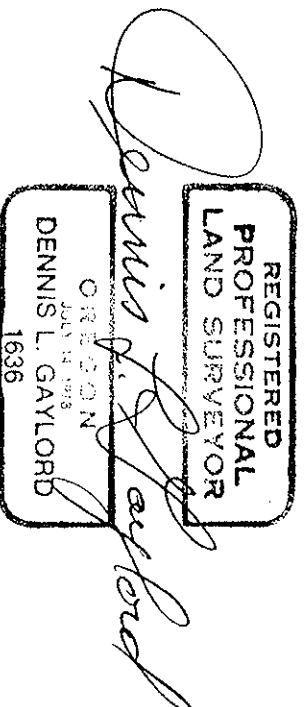

Renews June 30, 2001

Recorded at the office of County Surveyor, County of Umatilla, State of Oregon, on: