

OREGON CORNER RESTORATION FORM

N-13

Section 16 Township 4S Range 25E
 County Morrow Date: May 4, 1998

Corner Designation: 4S25N13

Condition Report Only
 Not found
 Remonumented
 Unrecorded
 Surveied in
 Referenced out



Section corner common to sections 15, 16, 21, and 22,
 T4S, R25E, W.1M.

Previous Renewals / Surveys, etc.

The corner was originally established by Zenas F. Moody under contract No. 184 dated August 16, 1873. His record reads "Set stone 24x20x8 for Cor. to Secs. 21-22-15-16".

Monument and Accessories found: (condition and source)

Found a mound of stone on a rocky hillside. A stone marked S22 on the SE face and "R" on the top was in place on the south side of the mound. No other corners found in this survey were marked and we believe that the stone was marked by the NGS as they show this corner as having been verified in the field in 1969.

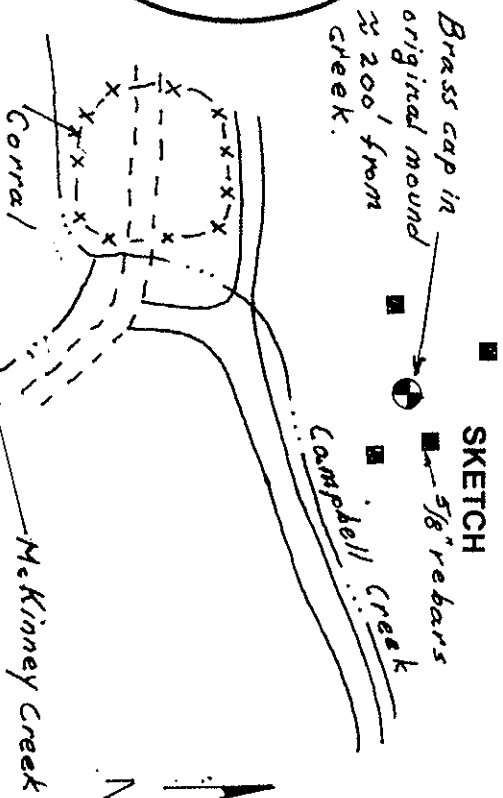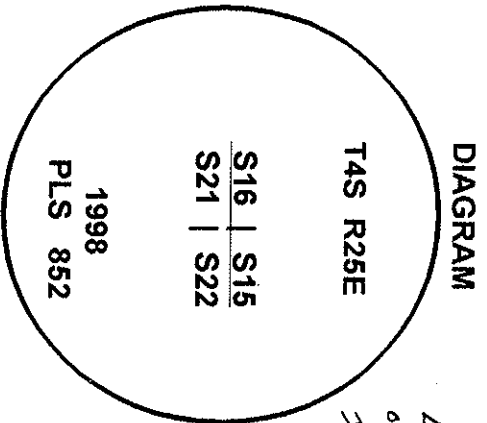

MONUMENT (S) AND ACCESSORIES SET (Procedures and Description)

Set a 2 1/4 inch brass cap on a 1 1/8" x 1' galvanized iron pipe stamped as shown in the diagram above in the mound of stone. Set the corner stone on the north side of the pipe with the face marked S22 facing up.

REFERENCES SET:

- A 5/8" x 24" rebar with a 1 1/8 inch red plastic cap stamped ORLS 852 and WAL5 139222 bears N21°43'22"W a distance of 40.41 feet.
- A 5/8" x 24" rebar with a 1 1/8 inch red plastic cap stamped ORLS 852 and WAL5 139222 bears N55°32'46"E a distance of 14.18 feet.
- A 5/8" x 24" rebar with a 1 1/8 inch red plastic cap stamped ORLS 852 and WAL5 139222 bears S23°58'27"E a distance of 23.62 feet.
- A 5/8" x 24" rebar with a 1 1/8 inch red plastic cap stamped ORLS 852 and WAL5 139222 bears S73°42'11"W a distance of 31.28 feet.

Location and comments
 Monument and references
 located using GPS.

Compass Declination

Surveyors Seal

RECEIVED BY:
Morrow County Surveyor
 Date: _____
 Rec'd By: _____
 No. _____

Firm / Agency
 Haddock Surveying
 Address
 P.O. Box 1574
 Pendleton, Or. 97801
 Party Chief
 Stephen K, Haddock

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

David L. Haddock
 OREGON
 JULY 12, 1966
 DAVID L. HADDOCK
 852