

OREGON CORNER RESTORATION FORM

N-5



Section 17 Township 4S Range 25E
 County Morrow Date: May 4, 1998

Corner Designation: 4S25N5 Condition Report Only
 Section corner common to sections 17, 18, 19, and 20, Not found
T4S, R25E, W.M. Remonumented
 Surveyed in
 Referenced out

Previous Renewals / Surveys, etc.

The corner was originally established by Zenas F. Moody under contract No. 184 dated August 16, 1873. His record reads "Set stone 21x16x9 for Cor. to Secs. 19-20-17-18".

Monument and Accessories found: (condition and source)
 Found a mound of stone on a slightly inclined grassy hillside. The mound lies about 150 feet east of the existing fence. No stone near record size was in the mound. There was little other rock around.

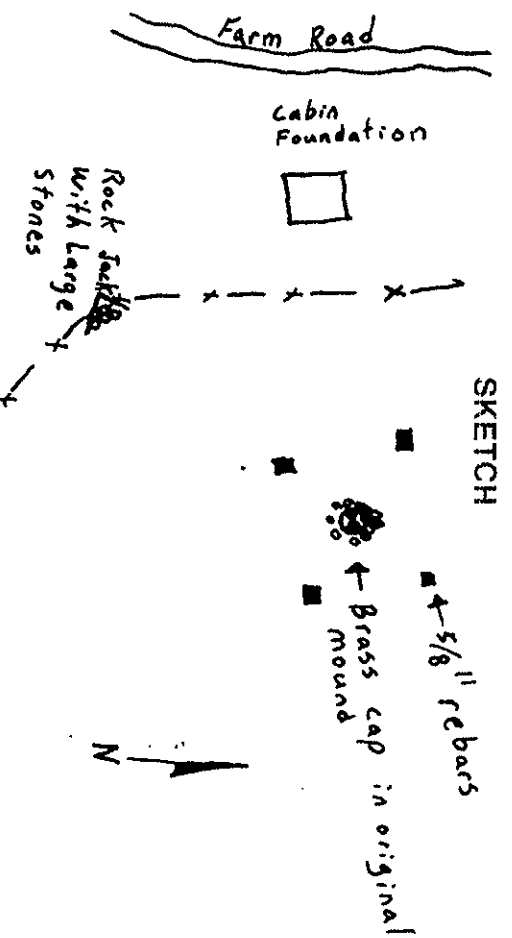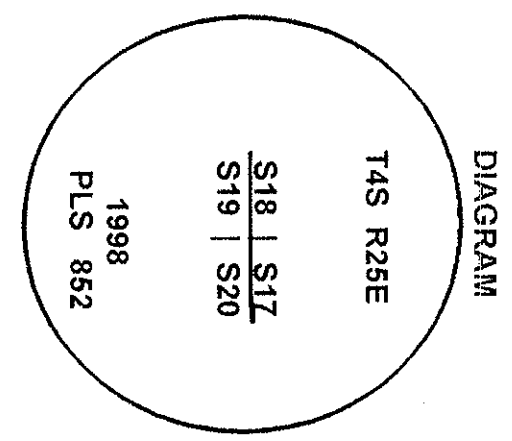

MONUMENT (S) AND ACCESSORIES SET (Procedures and Description)
 Set a 2 1/4 inch brass cap on a 1 1/8" x 1' galvanized iron pipe stamped as shown in the diagram above in the mound of stone.

- REFERENCES SET:
- A 5/8" x 24" rebar with a 1 1/8 inch red plastic cap stamped ORLS 852 and WALS 13922 bears N27°31'00"E a distance of 33.42 feet.
 - A 5/8" x 24" rebar with a 1 1/8 inch red plastic cap stamped ORLS 852 and WALS 13922 bears S64°04'55"E a distance of 31.82 feet.
 - A 5/8" x 24" rebar with a 1 1/8 inch red plastic cap stamped ORLS 852 and WALS 13922 bears S27°26'06"W a distance of 29.22 feet.
 - A 5/8" x 24" rebar with a 1 1/8 inch red plastic cap stamped ORLS 852 and WALS 13922 bears N57°40'33"W a distance of 27.02 feet.

Location and comments _____ Compass Declination _____ Surveyors Seal _____
 Monument and references _____
 located using GPS.

Firm / Agency _____
 Haddock Surveying _____
 Address _____
 P.O. Box 1574 _____
 Pendleton, Or. 97801 _____
 Party Chief _____
 Stephen K, Haddock _____
 No. _____

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

David L. Haddock

OREGON
 JULY 12, 1988
 DAVID L. HADDOCK
 852

RECEIVED BY:
 Morrow County Surveyor

Date:
 Rec'd By: