

OREGON CORNER RESTORATION FORM

Section 11 Township 4S Range 28E
 County Morrow Date: April 8, 2016

Corner Designation: 4S28E17

Corner common to sections 2, 3, 10, and 11, T4S, R28E, W.M., Morrow County, Oregon.


Condition Report Only
 Not found
 Remonumented
 Unrecorded
 Surveyed in
 Referenced out

Previous Renewals / Surveys, etc.


The corner was originally set by F.W. Campbell under contract 507 dated June 28, 1884. His record reads: Set basalt stone 14x10x7 ins. 9 ins. in the ground for cor. to Secs. 2, 3, 10 & 11 marked with 5 notches on S. and 2 notches on E. edges and raised mound of stone along side.

Monument and Accessories found: (condition and source)

The original stone plainly marked as described and firmly set on the west edge of a 3 foot diameter mound of stone.

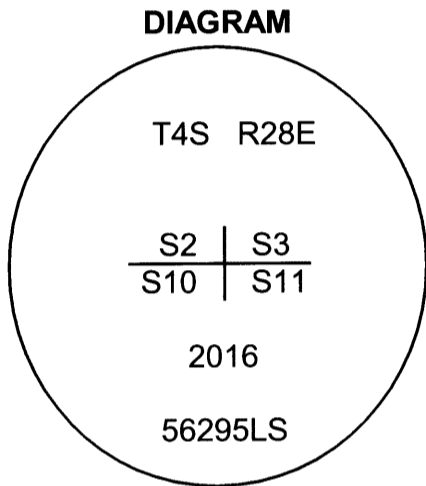

• = Rebar Reference
 ⊗ = Aluminum Cap

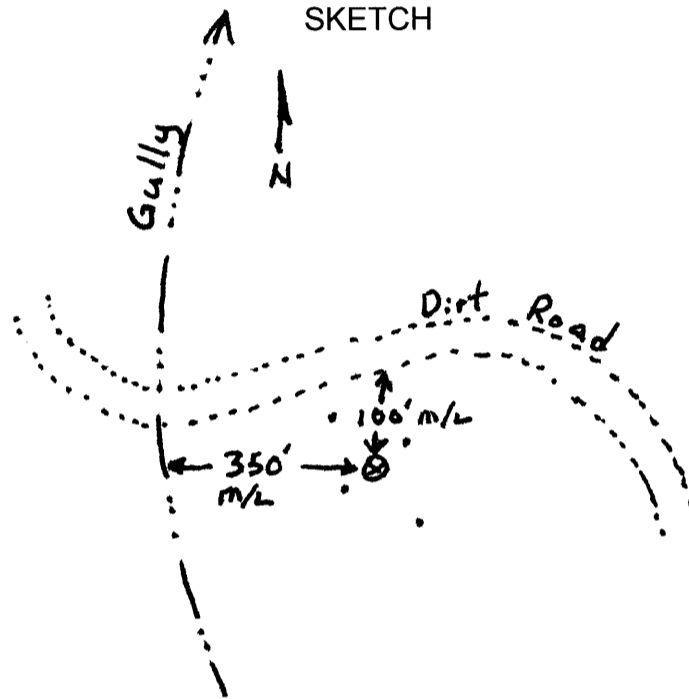

MONUMENT (S) AND ACCESSORIES SET (Procedures and Description)

At the position of the original stone I set a 2 1/2"x30" aluminum pipe with a 2 1/2" aluminum cap stamped as shown in the diagram above 22 inches in the ground to bedrock. Raised a 2 foot diameter mound of stone around the cap to the top.

For references, I set four, 5/8" by 24" rebars with 1.25" orange plastic caps stamped WTS and 56295LS as described below:

- an iron rebar bears N40°34'31"W, 58.14 feet flush with the surface and with a green cap;
- an iron rebar bears N60°16'57"E, 21.74 feet flush with the surface;
- an iron rebar bears S43°57'15"W, 23.43 feet flush with the surface;
- an iron rebar bears S38°55'20"E, 66.15 feet on the north edge of a 2 foot diameter rock;

Measurements were made with a Trimble RTK GPS.

Location and comments
 Witnessed by:

Compass Declination

Surveyors Seal

RECEIVED BY:
Morrow County Surveyor
 Date: 5-12-2016
 Rec'd By: S.K.H.
 No. 4528E17
 Survey No. 2016-1760D

Firm / Agency
Witness Tree Surveying
 Address
P.O. Box G
Pilot Rock, Or. 97868

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

Stephen K. Haddock

OREGON
 JULY 9, 2001
 STEPHEN K. HADDOCK
 56295LS

RENEWS: 6-30-17