

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

INDEX No. 0-12


History of original corner establishment:
Corner not previously established.

DIAGRAM
PLS R28E
SE1/16
S21
1984
PLS 848

Description of corner evidence found:
Corner not previously established.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set 2-1/2"x30" aluminum pipe with 2-1/2" aluminum cap, stamped as shown on the **DIAGRAM**, SET 23" in the ground.
From which.
A Spruce 12" dia. Bears, S42⁰W., 37.8 ft., scribed: SE 1/16 S21 BT
A Spruce 16" dia. Bears, N46⁰W., 18.2 ft., scribed: SE 1/16 S21 BT
Measurements to trees taken with a metal tape and magnetic compass, with Declination set off 20 deg. East.
Nailed a brass washer stamped PLS 848 on blaze above BT scribe, Bearing True Sign above blaze, and warning sign on back of each tree. Painted a 6" red band at breast ht. around each tree. Set steel fence posts with warning & Boundary Signs, North & East 5 ft. from the corner.

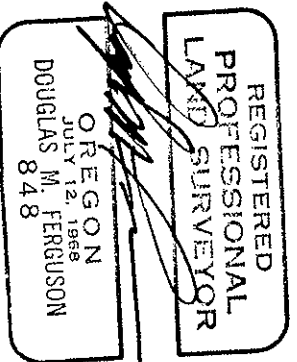

Work by D.M. Ferguson, PLS 848, Mt. Vernon Ore.
On July 27, 1984
Witnessed by J. David Brinton, PLS 2065

Office of..... SURVEYOR..... County of..... MDRear.....
State of Oregon....., I hereby certify that the within instrument was filed in this office
for record on the 14th day of..... September....., 1985
..... David H. Kumbert..... by..... David H. Kumbert.....
(COUNTY OFFICIAL) (DEPUTY)

RECORDED BY

Form R6-7100-57 (9/71)

Morrow County Surveyor

Date 1-10-86

Book SYMID

No. 99D-K