


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

INDEX No. T-13

History of original corner establishment: Established in 1873, by Corner originally established by Zenas F. Moody, under General Land Office Contract No. 184, Surveyor General's Notes State: Set a post in an earth mound for 1/4 S cor.

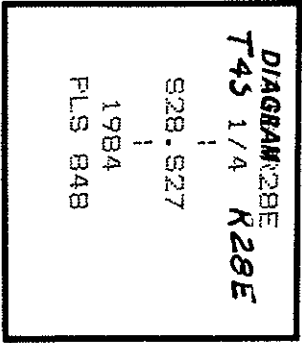

In 1968 Donald L. Staebler found the remains of the original post. (Staebler's field notes state, that he found the original post, not shown on his map) While performing a survey, see Morrow County Survey map No. 204-K, Staebler also found the two previously unrecorded bearing trees which are shown on the above mentioned map, as follows:
24" Tamarack, N85°E., 85 lks. and a 24" Tamarack, North S5 lks.
At the point where the remains of the post was found Staebler set a 2" I.D. iron pipe, then tied the previously unrecorded trees as described above.

Description of corner evidence found:

Found a 2" I.D. Iron pipe, with a wood plug & nail, set 5" above the ground, with a steel fence post set alongside.

Found the following trees:

A Fir, 20" dia. Bears, N 5°W., 36.8 ft., scribed, 1/4 BT
A Fir, 30" dia. Bears, N60°W., 38.4 ft., scribed, 1/4 BT
Scribing is unprofessional.

It is unknown, if these are the trees referred to by Staebler, it appears that they where scribed at least 40 years ago. There is no evidence of Tamarack trees as referred to by Staebler. Since the pipe fits property and land corners as established by Staebler, as shown on his map (Morrow Co. Survey No. 204-K) along the section line to the south, it is accepted as the 1/4 corner.
Description of monument and accessories established to perpetuate the

original location of this corner:


Set 2-1/2"x30" aluminum pipe with 2-1/2" aluminum cap, stamped as shown on the **DIAGRAM**, SET 26" in the ground, set the 2" iron pipe alongside and below ground level.

From Which

A Fir 8" dia. Bears, N82°W., 9.4 ft., scribed: 1/4 S28 BT
A Fir 7" dia. Bears, S37°E., 14.5 ft., scribed: 1/4 S27 BT
Measurements to trees taken with a metal tape and magnetic compass, with Declination set off 20 deg. East.

Nailed a brass washer stamped PLS 848 on blaze above BT scribe, Bearing Tree Sign above blaze, and warning sign on back of each tree. Since the corner is in a populated area, no paint is used due to aesthetics.

Set steel fence post with warning sign North 3 ft. from the corner & reset existing fence post alongside pipe & attached a warning sign.

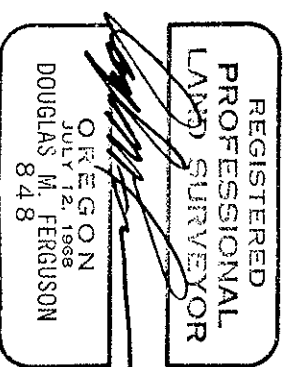

Work by D.M. Ferguson, PLS 848, Mt. Vernon Ore.
On Aug. 1, 1984
Witnessed by J. David Brinton, PLS 2065

Office of..... Silverdale County of..... MORROW
State of..... Oregon I hereby certify that the within instrument was filed in this office
for record on the 12th day of..... September 1985
by..... David F. Kumbert by..... Samuel Reynolds
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

RECORDED BY
MORROW County Surveyor

Date 1-10-86

David Reynolds

No. 791-K