


# RECORD OF LAND CORNER MONUMENTATION

CENTER-WEST 1/16 CORNER SECTION 33, T. 4 S., R. 28 E., W.M.

ORIGINALLY ESTABLISHED BY: Fayette S. Munro, PLS 1832

COUNTY SURVEYOR DOCUMENTATION: Map of Survey recorded 11/88 as C-873-K-540 and associated monumentation record filed 11/88

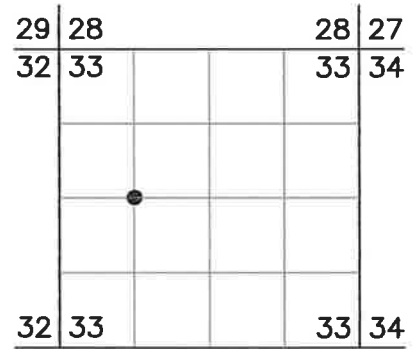

**ORIGINAL DESCRIPTION:** At the corner point I set a 2½"x30" alum. pipe with a 2½" alum. cap containing a magnet and marked: (diagram shown)  
Monument is 25" in the ground.

From the corner:

- A White Fir, 25" dia., S5¼°W, 71.8 ft.; marked: CW1/16 S33 BT
- A White Fir, 19" dia., S78¼°E, 37.3 ft.; marked: CW1/16 S33 BT


**EVIDENCE FOUND:** Found a 2½" aluminum pipe with 2½" aluminum cap projecting 2" above ground with no visible mound of stone. I searched for, but found no remains of either bearing tree. There is a high mortality rate among the larger trees in the area, many of which have been wind-thrown.

**DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:**  
I accept the found aluminum monument for the true corner position.

MONUMENT MARKED:

From which, I SCRIBE THE FOLLOWING NEW BEARING TREES:

- ▶ A lodgepole pine, 8" dbh bears N.4°E., 42.32 ft. marked "CW1/16" in upper blaze and "BT" in lower blaze
- ▶ A western larch, 9" dbh bears S.53°E., 19.22 ft. marked "CW1/16" in upper blaze and "BT" in lower blaze

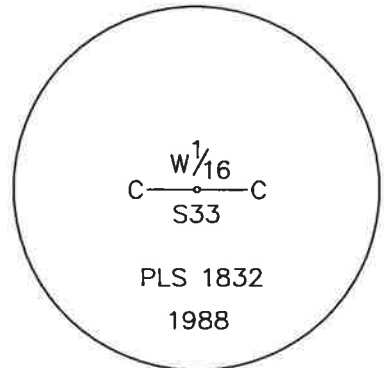

Painted a 6 inch red band around the bearing trees, and also painted the blazes red. Attached USFS signs 54-3 and 54-9 to the bearing trees. Distances were measured with a steel tape to a 60d nail set in the side-center-right at the root crown of each BT. Bearings were measured with a magnetic compass with 14° East declination.

**RESTORATION BY, STAMP AND DATE:**

Work Performed September 28, 2021 by:

Jason L. Hatfield, PLS

USDA FOREST SERVICE  
NORTHEAST OREGON LAND ZONE  
1550 Dewey Avenue, Suite A  
Baker City, OR 97814  
(541) 523-1337

**RECEIVED BY**  
**Morrow County Surveyor**  
Date: 1-5-2022  
Rec'd By: MPK  
No.: 4528X10  
Folder No.: \_\_\_\_\_

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

  
**OREGON**  
NOVEMBER 30, 2007  
**JASON L. HATFIELD**  
#69454

EXPIRES: 6/30/2023