


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

None

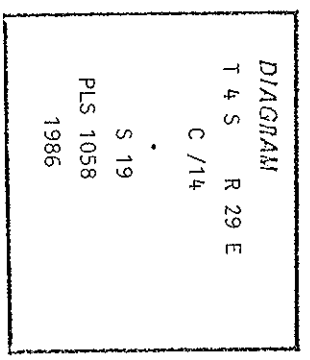

Description of corner evidence found:

None

Description of monument and accessories | established to perpetuate the original location of this corner:

At point for C 1/4 set 3-1/4 inch PCL aluminum cap on 2-1/2 x 30 inch aluminum pipe 26 inches in the ground 2 feet dia. mound of stone. Cap marked as shown above.

11 inch white fir bears S. 85° E.; 23.4 feet marked C 1/4 S 19 BT

12 inch white fir bears N. 04° W.; 7.3 feet marked C 1/4 S 19 BT.

± 200 feet West to Road 050

54-3, and 54-9 or 54-4 signs on all bearing trees. Trees have red band and blazes are painted red. Brass washer nailed to BT portion of blaze on new bearing trees and on old bearing trees if needed. Steel guard post with 54-9 or 54-4 sign set 0 to 6 feet from corner. Distance measured in horizontal feet to center of tree. Bearings measured with magnetic compass, 20° East declination.

CERTIFICATION

I, Ken R. Jenkins

certify the information shown herein is true and correct.

Ken R. Jenkins
Signature Ground Party Chief

I, Thomas M. Hanson

certify that this Corner Record correctly represents work performed by me or under my direction

Thomas M. Hanson
Signature of Surveyor & Seal

Date: 7-86 Reg. No. PLS 1058

Employer: PROFESSIONAL CONSULTANTS

Office of: Surveyor County of: Hawaii
State of: Alegha I hereby certify that the within instrument was filed in this office
for record on the day of November, 1986
David H. K. Brown
(COUNTY OFFICIAL) by (DEPUTY)