


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

A-15

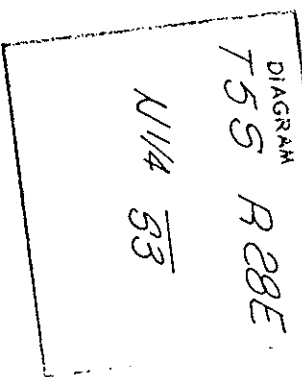

History of original corner establishment:

Work in Section 3 was done by Edward W. Trudeau in August, 1881, under Contract No. 417.

From B.L.M. notes, there is no record of the corner being reset when the correction was made on the North line of the Township.

No record of subsequent remonumentation found in County Records.


Description of corner evidence found:
No evidence found.

I set the monument described below at the midpoint between the found NW corner and the NE corner of Section 3.

Description of monument and accessories I established to perpetuate the original location of this corner

As the position described above, I set a 2 1/2" x 30" iron pipe 22" in the ground, with a brass cap marked as shown:
From which I scribed Bts:
A fir 11" in diam. bears S 74° E 20.6' marked N 1/4 S 3 T 55 R 28E.
A fir 10" in diam. bears S 53 W 29.8' marked N 1/4 S 3 T 55 R 28E.

- nailed a brass washer marked PLS 1638 to the BT blazes.
- set a steel fence post 5' East.
- painted a red band around the Bts and face of scribe
- used a steel tape and a magnetic compass with 21° East variation and measured a horizontal distance to one center of Bts.
- This corner was set October 30, 1979.

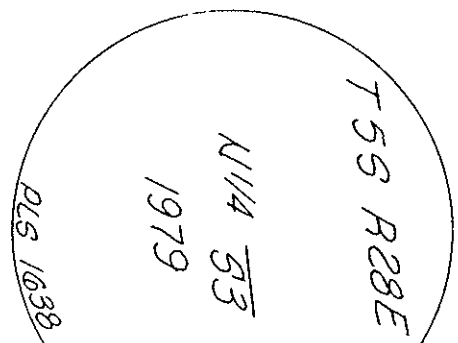

REGISTERED
PROFESSIONAL
LAND SURVEYOR
Terry E. Hamby
OREGON
JULY 14, 1978
TERRY E. HAMBY
1638

County of MORROW, I hereby certify that the within instrument was filed in this office

Office of Oregon County Surveyor
State of Oregon
for record on the 1st day of Dec 1979
by *David H. Allen* (DEPUTY)
(COUNTY OFFICIAL)

RECEIVED BY
Morrow County S
Date 12-10-79
Rec'd By *SMC*
No. 266-
100120