


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

D-12

Misery of original corner establishment:

Unsurveyed - subdivided Section.

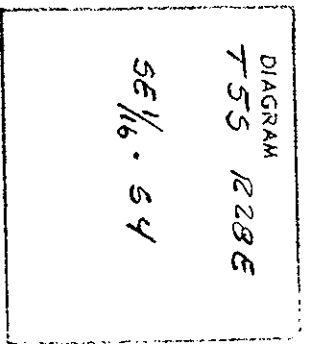

No record of subsequent remonumentation found in County Records.

Description of corner evidence found:

No evidence found.

I set the monument described below at the intersection point of the computed four 1/16 corners of Section 4.

Description of monument and accessories I established to perpetuate the original location of this corner

At the position described above, I set a 2 1/2" x 30" iron pipe 24" in the ground, with a brass cap marked as shown:


From which I scribed BTs:

- A lodge pine 1 1/2" in diam. bears N 85° E 11.4' marked SE 1/16 S 4 BT.
- A lodge pine 10" in diam. bears S 64° W 9.3' marked SE 1/16 S 4 BT.
- I nailed a brass washer marked PLS 1638 to the BT blazes.
- I set a steel fence post 5' West and 5' South with signs.
- I painted a red band around the BTs and face of scribe.
- I used a steel tape and a magnetic compass with 21° East variation and measured a horizontal distance to the center of BTs.
- This corner was set November 1, 1979.
- Witness by W. Keith Sands and Jerry I. Ogawa.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Terry E. Hamby

OREGON
JULY 14, 1978
TERRY E. HAMBY
1638

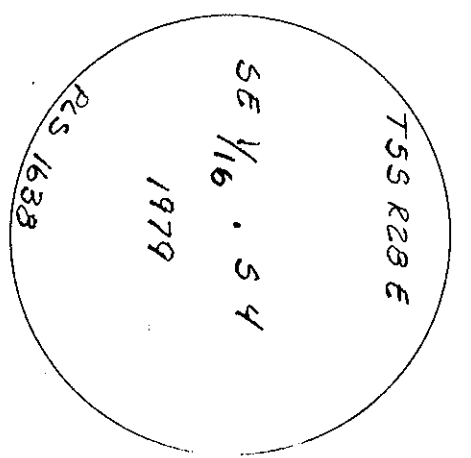

Office of _____ County Surveyor _____ County of _____ MORROW _____
 State of Oregon _____, I hereby certify that the within instrument was filed in this office
 for record on the _____ day of _____
 _____ (COUNTY OFFICIAL) _____ by _____ (DEPUTY)

RECEIVED BY
 Morrow County Surveyor
 Date 12-10-79
 Rec'd By WRS
 No. 257-K

CONCERNING DRAWING

#267-K