


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

L-16

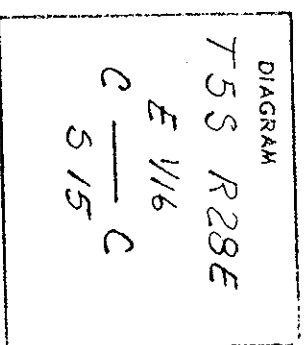

History of original corner establishment:

Unsurveyed - subdivided Section.

No record of subsequent remonumentation found in County Records.

Description of corner evidence found:

No evidence found.

I set the monument described below at the midpoint between the found E 1/4 and the computed C 1/4 of Section 15.

Description of monument and accessories established to perpetuate the original location of this corner

At the position described above, I set a 2 1/2" x 30" iron pipe 27" in the ground, with a brass cap marked as shown:

from which I scribed BIs:

A fir 16" in diam. bears N 63° E 30.7' marked CE 1/16 S 15 BI.
 A fir 14" in diam. bears S 40° W 39.5' marked CE 1/16 S 15 BI.

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

Terry E. Hamby

OREGON
 JULY 14, 1978
 TERRY E. HAMBY
 1638

I nailed a brass washer marked PLS 1638 to the BI blazes.

I set a steel fence post 25' North and 4' South with signs 54-2 & 54-4


I painted a red band around the BIs and face of scribe.

I used a steel tape and a magnetic compass with 21°

East variation and measured a horizontal distance to the center of BIs.

This corner was set October 20, 1979.

Witness by Dennis L. Paasch and W. Keith Sands.

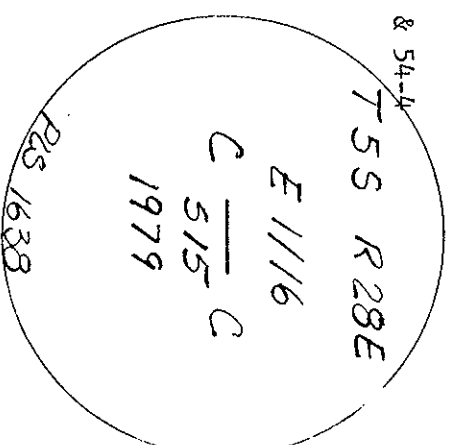

Office of County Surveyor Morrow
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on this 4th day of Dec 1979
Dennis L. Paasch
 (COUNTY OFFICIAL) by (DEPUTY)

RECEIVED BY
 Morrow County Surveyor
 Date 10-10-79
 Filed By *MSTJ*
 No. 269-R

concealing drawing