

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

P-10


History of original corner establishment:

The section in which this corner is located was originally surveyed under Contract Survey No. 417, dated 1881.

This section was later included in Dependent Resurvey authorized in 1938, and approved Feb. 21, 1941.

Note:

The corner identified by this record was not monumented in connection with either of the surveys noted above.

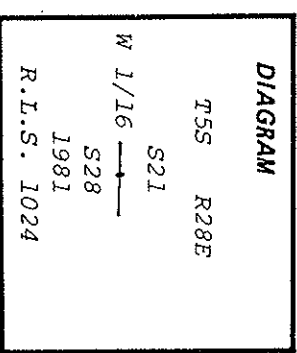

Description of corner evidence found:

Corner not previously monumented.

Description of monument and accessories | established to perpetuate the original location of this corner:

At the location of this corner, as established by a survey conducted by me, set a 2 1/2 inch alum. pipe, 30 inches long, 2 feet in the ground, with an alum. cap marked as shown above.


From The monument as set,

A Bearing Tree, a 10" Spruce, bears N 21° W, a distance of 18.5 feet, which I marked W 1/16 S21 BT.

A Bearing Tree, a 10" Spruce, bears S 3° W, a distance of 12.6 feet, which I marked W 1/16 S 21 BT.

Attached USFS signs, 54-3 and 54-9, and a brass tag marked R.L.S. 1024, to all trees. Painted blazes and a 6" wide band of fluorescent red around trunks.

Set a 6' steel fence post, 5' East of corner and attached USFS signs, 54-2 over 54-9.

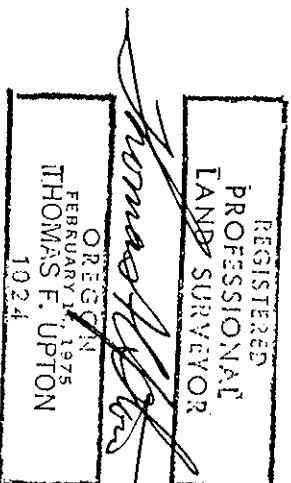

Thomas F. Upton, Certificate No. R.L.S. 1024

Office of... W. Sunleyer County of... Morrow
 State of... Oregon hereby certify that the within instrument was filed in this office
 for record on the 12th day of January 1982
David H. Krumbein by Martha A. Hughes
 (COUNTY OFFICIAL) (DEPUTY)

FORM R6-7100-57 (9/71)

RECEIVED BY
 Morrow County Surveyor
 1253 January 12, 1982
 Received by M. Hughes
 No. 479-K
 Pdf drawn PG. C-460-K