


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

M-23

History of original corner establishment:

Center-South 1/16 corner of Sec. 13, T6S R25 E., W.M., not previously established of record.

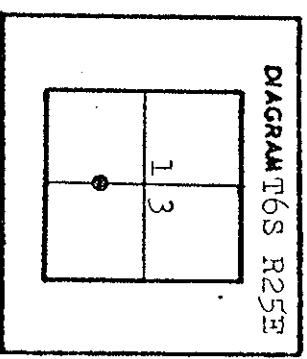

Description of corner evidence found:

None.

I establish, by survey, the center-south 1/16 corner of Sec. 13 on line and at mid point between the center 1/4 corner and the South 1/4 corner.

See my recorded Map of Survey dated Oct. 1980.

Description of monument and accessories established to perpetuate the original location of this corner

At the corner point:

Set a 1 1/2"x30" iron pipe 23" in the ground with brass cap marked as shown:


From which I scribe NEW BEARING TREES:

A red fir, 12" in diam. bears S. 54° E., 17.3 ft., mkd. CSI/16 S13 BT.

A red fir, 11" in diam. bears S. 19° W., 15.6 ft. mkd. CSI/16 S13 BT.

Surrounded pipe with mound of stone to top of pipe.

Used magnetic compass with 19° East variation and steel tape, measuring to face of BT blaze.

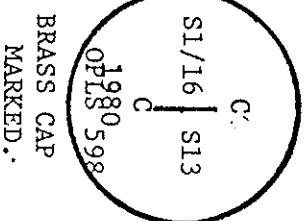

BRASS CAP MARKED.

Done Oct. 23, 1980.

Witnesses: G. L. Earl, O.P.L.S. and R. L. Graham, Kinzua corp.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Baggett
OREGON
JULY 12, 1963
ROBERT D. BAGGETT
598

Office of.....Surveyor.....County of.....MORROW.....
 State of.....OREGON....., I hereby certify that the within instrument was filed in this office
 for record on the 19 day of November, 1980...
David H. Klevin
 (COUNTY OFFICIAL) by..... (DEPUTY)

RECEIVED BY
 MORROW County Surveyor
 Date 11-10-80
 Rec'd By M.S.J.
 No # 412-K
Added to dug no. #393-K