


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

M-25

History of original corner establishment:

South 1/16 corner on the East boundary of Sec. 13, T6S., R. 25 E., W.M., not previously established of record.

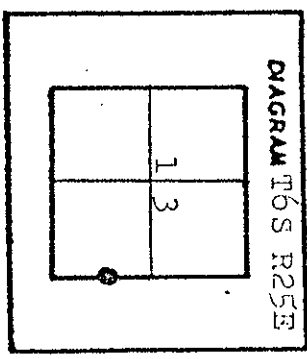

Description of corner evidence found:

None.

I establish, by survey, the South 1/16 corner on the East boundary of Sec. 13 latitudinally at a point midway between the Southeast corner of Sec. 13 and the E 1/4 corner of Sec. 13 and longitudinally on the Range line between the West 1/4 corner of Sec. 18, T.6S., R. 26 E., and the original line tree one chain South of the SE closing corner of Sec. 13.

See my recorded Map of Survey dated Oct. 1980.
Description of monument and accessories established to perpetuate the original location of this corner

At the corner point:

Set a 1 1/2"x30" iron pipe 28" in the ground with brass cap marked as shown.

From which I scribe NEW BEARING TREES:

A white fir, 6" in diam. bears S. 66° W., 17.1 ft. mkd. S1/16 S13 BT.
A white fir, 8" in diam. bears N. 24° W., 42.6 ft. mkd. S1/16 S13 BT.

Surrounded pipe with mound of stone, 2 ft. base to top of pipe.


Corner is 10 ft. East of a fence line which runs North and South.

Used magnetic compass with 20° East variation and steel tape, measuring to face of BT blaze.

Done Oct. 23, 1980.

Witnesses: G. L. Earl. O.P.L.S. and R. L. Graham, Kinzua corp.

BRASS CAP
MARKED:



REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Baggett
 OREGON
 JULY 12, 1963
 ROBERT D. BAGGETT
 598

Office of.....Surveyor.....Morrow.....
 State of.....Oregon....., I hereby certify that the within instrument was filed in this office
 for record on the 19th day of November, 1980,
David H. Earl
 (COUNTY OFFICIAL) by..... (DEPUTY)

RECEIVED BY

Morrow County Surveyor
 Date 11-10-80
 Rec'd By W.M.S.T.
 No. # 413-K

Agenda to Aug no #393-K