

X-23

OREGON CORNER RESTORATION FORM

COUNTY: Morrow. DATE: 06/29/11

CORNER DESIGNATION: X-23, The Center Quarter corner of Section 36, Township 6 South, Range 25 East, W.M..

PREVIOUS RENEWALS/SURVEYS ETC: Corner not originally set.

MONUMENT AND ACCESSORIES FOUND: None.

MONUMENT MARKING DETAIL:

WELLS SURVEYING

+
54657PLS

MONUMENT SET: At the calculated position set a 5/8"x24" iron rebar with a 1 1/4" purple plastic cap 20" in the ground and surround with a mound of stones and earth. Cap is marked as shown in "Monument Marking Detail".

New accessories:

- A 6" ponderosa pine scribed C1/4 S36 BT on single blaze bears North 34° East, 32.9 feet to tree centerline.
- A 8" ponderosa pine scribed C1/4 S36 BT on single blaze bears South 29° East, 40.3 feet to tree centerline.
- A 8" ponderosa pine scribed C1/4 S36 BT on single blaze bears South 80° West, 19.8 feet to tree centerline.
- A 8" ponderosa pine scribed C1/4 S36 BT on single blaze bears North 52° West, 66.4 feet to tree centerline.

Attached bearing object signs to all bearing trees. Attached witness sign facing South to the ponderosa pine bearing tree South 80° West. There is a steel fence post about 3 feet South of corner.

LOCATION AND COMMENTS: Corner is located in forested land. There are no specific features near the corner.


STATE PLANE COORDINATE, NAD 83(CORS96)(EPOCH 2002.00), International Feet:
North = 488014.12
East = 8414861.77

FIRM: Wells Surveying
P.O. Box 1696
Pendleton, OR 97801

COMPASS DECLINATION: 18° East Surveyor's Seal

Witnesses: William R. Wells, PLS

\6S25X23

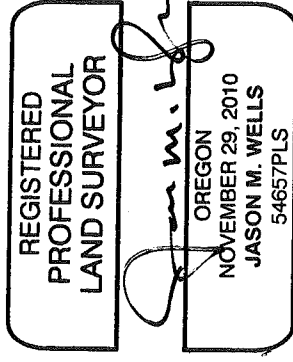

RENEWS: 6/30/12