


BASIS OF BEARINGS

S 89°17'38"E ALONG THE SOUTH LINE OF SECTION 9 TOWNSHIP 4 NORTH, RANGE 25 EAST, AS SHOWN ON THE PLAT OF "SOUTH BOARDMAN".

REFERENCES

THE PLAT OF "SOUTH BOARDMAN"
 PARTITION PLAT #2008-7
 CS C-1403-M
 CS B-1013-E
 CS 1483-C

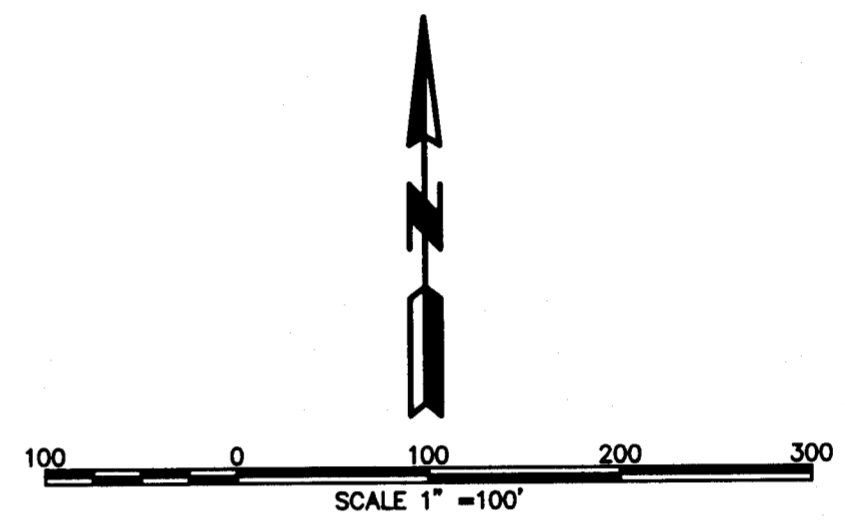

LEGEND

- △ INDICATES 3/8" X 30" REBAR WITH YELLOW PLASTIC CAP PER CS C-1403-M, MONUMENT RESET BY THIS SURVEY.
- INDICATES FOUND MONUMENT PER CS 1483-C FILE# 1483
- ⊙ INDICATES FOUND MONUMENT PER CS B-1013-E FILE# 785
- ⊙ INDICATES FOUND MONUMENT PER PARTITION PLAT #2008-7
- (XX.XX) INDICATES RECORD DIMENSION PER PLAT OF SOUTH BOARDMAN
- INDICATES BOUNDARY LINE
- INDICATES CENTERLINE OF RIGHT OF WAY OR HIGHWAY ALIGNMENT
- INDICATES MONUMENT REFERENCE LINE

SURVEY NARRATIVE

THIS SURVEY WAS PERFORMED AT THE REQUEST THE CITY OF BOARDMAN. THE PURPOSE OF THE SURVEY WAS TO REPLACE A SURVEY MONUMENT, SET BY COUNTY SURVEY C-1403-M, AND DISTURBED DURING CONSTRUCTION OF ROAD IMPROVEMENTS TO SOUTH MAIN STREET. THE ORIGINAL MONUMENT, A 3/8" IRON ROD WITH A YELLOW PLASTIC CAP STAMPED "EDWARDS 951", WAS REMOVED AND PRESERVED TO BE RESET AT THE ORIGINAL HORIZONTAL LOCATION DOWN 0.5 INSIDE A MONUMENT CASE. THE MONUMENT WAS DISCOVERED AND IT'S LOCATION SURVEYED ON OCTOBER 7, 2009, AND WAS RESET ON AUGUST 31, 2010. NO DETERMINATION WAS MADE AS TO CORRECTNESS OF THE MONUMENT LOCATION.

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR
Michael B. Posada
 OREGON
 JANUARY 20, 1986
 MICHAEL B. POSADA
 02848LS

EXPIRES: 12-31-10
 DATED: 10-29-10

RECEIVED BY
 Morrow County Surveyors
 Date Nov 10 2010
 Rec'd By SKB
 No. 1586-C

SURVEY FOR MONUMENT REPLACEMENT
 THE EAST TERMINUS OF THE BOUNDARY BETWEEN
 LOT 5 AND 6, BLOCK 2 OF
 THE PLAT OF SOUTH BOARDMAN
 IN THE SW 1/4, SW 1/4, SEC. 9, T.4S., R.25E. W.M., MORROW CO., OREGON

SCALE: 1" = 100'		SHEET 1 OF 1
DATE: 09/16/10		
JOB NO. 439-33 (070)		

1586